



EASY LED UNIVERSAL 2.0

FRESHWATER

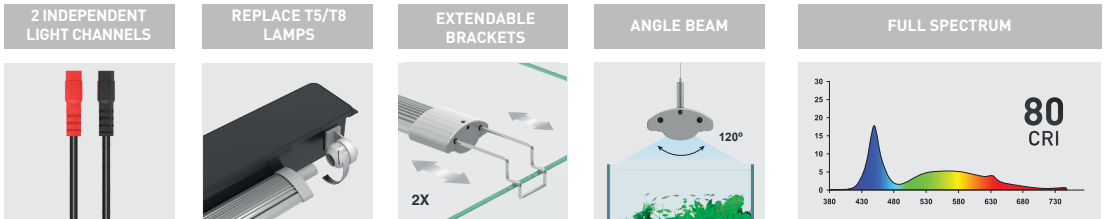

SECURE

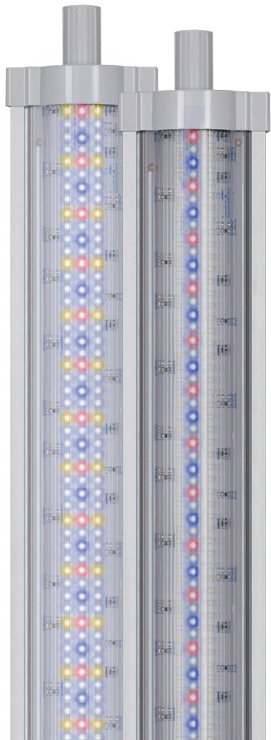

ECONOMIC



ECOLOGIC



LOW CONSUMPTION

FOR ALL
AQUARIUM
BRANDS

NOT INCLUDED



Compatible with
LUMINUS
SMART LED CONTROLLER
Code: 11649



DIMENSION	AQUARIUM MINIMUM LENGTH*	AQUARIUM MAXIMUM LENGTH*	POWER	COLOUR TEMPERATURE (KELVINS)	T5 LAMPS REPLACEMENT	T8 LAMPS REPLACEMENT	LUMINOUS FLUX (lm)	PRODUCT CODE
438mm	45cm	70cm	20W	6800K	24W	15W	1738	12358
549mm	55cm	81cm	28W	6800K	24W	-	2414	12359
590mm	60cm	85cm	28W	6800K	28W	18W	2433	12360
742mm	75cm	100cm	36W	6800K	35W	25W	3128	12361
849mm	85cm	110cm	44W	6800K	39W	-	3590	12362
895mm	90cm	115cm	44W	6800K	45W	30W	3824	12363
1047mm	105cm	130cm	52W	6800K	54W	-	4519	12364
1149mm	115cm	140cm	62W	6800K	54W	-	5203	12365
1200mm	120cm	145cm	62W	6800K	54W	36W	5388	12366
1450mm	145cm	170cm	72W	6800K	80W	-	6257	12367

*Without EASY LED UNIVERSAL end caps

EASY LED UNIVERSAL 2.0

SPARE PARTS

EXTENSION CABLE | 10847




SPLITTER CABLE B/B | 11146



SPLITTER CABLE R/B | 12952




PLASTIC END CAPS | 10841




KIT STAINLESS STEEL CABLE | 10840



EXTENDABLE BRACKETS | 14036

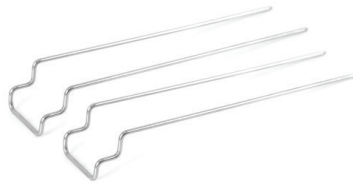



PLASTIC END CAPS (1200/1450mm) | 10842



When using the SPLITTER CABLE, the adaptor must be appropriate.

INPUT = OUTPUT

Exemple:

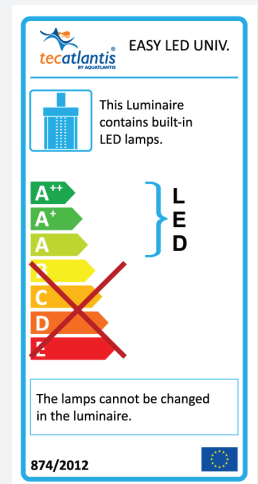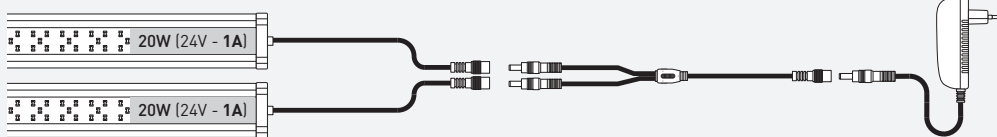

ADAPTORS

Adaptor 1A	Adaptor 1,5A	Adaptor 2A	Adaptor 2,5A	Adaptor 3,75A	Adaptor 5A
24V	24V	24V	24V	24V	24V
EASY LED UNIVERSAL 438	EASY LED UNIVERSAL 590 EASY LED UNIVERSAL 1200*	EASY LED UNIVERSAL 742 EASY LED UNIVERSAL 895 EASY LED UNIVERSAL 1450*	EASY LED UNIVERSAL 1047	If a SPLITTER CABLE is used	If a SPLITTER CABLE is used
10024	10025	10026	10027	11158	11242

* 2x Adaptor